



**JOHN DEERE**


**ENGINE PERFORMANCE CURVE**

Rating: 60 Hz - 373hp (278kW) @ 1800 RPM  
 Application: Marine

PowerTech™ 9.0L Engine

Model: 6090SFM85

Generator Efficiency (%)	Power Factor	Calculated Gen-Set Rating		Prime Power	10% Overload Power
		kW	kVA	hp (kW)	hp (kW)
88-92	0.8	245-256	306-320	373 (278)	410 (306)

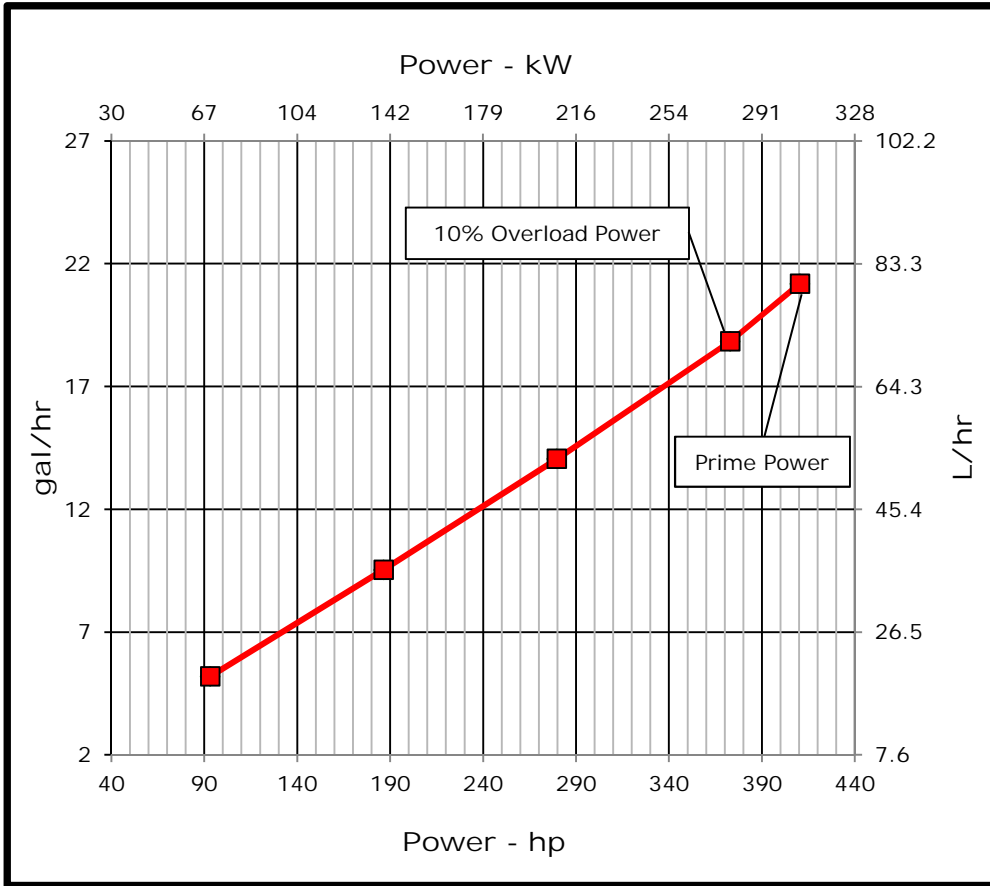

**REFERENCE CONDITIONS**

Air Intake Restriction.....12 in.H<sub>2</sub>O (3 kPa)  
 Exhaust Back Pressure..... 30 in.H<sub>2</sub>O (7.5 kPa)

Rated speed and power  
 Gross power guaranteed within ±5% at SAE J1995 and ISO 3046  
 J1995 and ISO 3046 conditions:

- 77 °F (25 °C) air inlet temperature
- 29.31 in.Hg (99 kPa) barometric pressure
- 104 °F (40 °C) fuel inlet temperature
- 0.853 fuel specific gravity @ 60 °F (15.5 °C)

Ambient air temperature is defined to be the temperature of ambient air close to operating vessel that is not influenced in any manner by operating characteristics of the vessel (free field temp).

Conversion factors:

- Power: kW = hp x 0.746
- Fuel: 1 gal = 7.1 lb, 1 L = 0.85 kg
- Torque: N·m = lb-ft x 1.356

All values from currently available data. Subject to manufacturing and measurement variations and to change without notice. Actual performance is subject to application and operation conditions outside of John Deere control.

Notes:

Constant Speed Auxiliary – The marine Generator engine rating is the power available under normal varying electrical load factors\* for an unlimited number of hours per year in commercial applications. This rating incorporates a 10 percent overload capability, and conforms to ISO 8528 prime power. Average load over a 24-hour period shall not exceed 67 percent of the prime rating, of which no more than two hours are between 100 percent and 110 percent of the prime rating.

Possible applications: This rating is use for applications that require constant speed operation in power generation or auxiliary applications such as generators and hydraulic pumps.

Designed/Calibrated to meet:

- EPA Commercial Marine Tier 3
- IMO MARPOL Annex VI Compliant

Certified by:

*Adam Paull*

Ref: Engine Emission Label

9-Mar-14

Performance Curve: 6090SFM85\_F

All values at rated speed, power, and standard conditions, per SAE J1995 unless otherwise noted.

# Engine Installation Criteria

## General Data

Model	6090SFM85		
Number of Cylinders	6		
Bore	118.4 mm	4.66 in	
Stroke	136 mm	5.35 in	
Displacement	9 L	549 in <sup>3</sup>	
Compression Ratio	16.3:1		
Valves per Cylinder, Intake/Exhaust	2/2		
Combustion System	Direct injection		
Firing Order	1-5-3-6-2-4		
Engine Type	In line, 4 Cycle		
Aspiration	Turbocharged and Aftercooled		
Aftercooling System	Seawater cooled		
Engine Crankcase Vent System	Closed		

## Cooling System\*

Total Engine to Seawater Heat Rejection**	268.6 kW	15289 BTU/min	
Aftercooler Heat Rejection	74.18 kW	4222 BTU/min	
Coolant Flow	297 L/min	78 gal/min	
Thermostat Start to Open	82 °C	180 °F	
Thermostat Fully Open	94 °C	202 °F	
Min. Coolant Fill Rate	12 L/min	3.2 gal/min	
Min. Pressure Cap	110.3 kPa	16 psi	
Max. External Coolant Restriction	40 kPa	5.8 psi	
Normal Operation Max Top Tank Temperature	100 °C	212 °F	
≤ 5% of Total Operating Time Top Tank Temperature	100-110 °C	212-230 °F	
Absolute Max Top Tank Temperature	110 °C	230 °F	
Recommended Fuel Cooler	11 kW	634 BTU/min	
Engine Radiated Heat	36 kW	2037 BTU/min	

\* The cooling system should be capable of typical at ambient up to the maximum conditions in which the vessel will operate.

Typical operation is defined as the average load sustainable in the vessel over 10 min.

\*\* Reference 32 °C Sea Water Temperature

## Physical Data

Length to rear face of block	1293 mm	50.9 in
Length maximum	1714 mm	67.5 in
Width maximum	975 mm	38.4 in
Height, crank centerline to top	662 mm	26.1 in
Height, crank centerline to bottom	320 mm	12.6 in
Weight, with oil, no coolant (includes engine, flywheel housing, flywheel, and electronics)	1056 kg	2327 lb
Center of Gravity Location, X-axis From Rear Face of Block	408 mm	16.1 in
Center of Gravity Location, Y-axis Right of Crankshaft	38 mm	1.5 in
Center of Gravity Location, Z-axis Above Crankshaft	200 mm	7.87 in
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing with 5-G Load	814 Nm	600 lb-ft
Thrust Bearing Load Limit, Forward Continuous	8.6 kN	1933 lbf
Thrust Bearing Load Limit, Forward Intermittent	13 kN	2923 lbf
Thrust Bearing Load Limit, Rearward Continuous	4 kN	899 lbf
Thrust Bearing Load Limit, Rearward Intermittent	6 kN	1349 lbf

## Electrical System

Min. Recommended Battery Capacity, 12V @32 °F (0 °C)	1100 amps
Min. Recommended Battery Capacity, 24V @32 °F (0 °C)	750 amps
Starter Rolling Current, 12V @32 °F (0 °C)	500 amps
Starter Rolling Current, 24V @32 °F (0 °C)	300 amps
Min. Voltage at ECU during Cranking, 12V	6 volts
Min. Voltage at ECU during Cranking, 24V	10 volts
Max. Allowable Start Circuit Resistance, 12V	0.002 ohms
Max. Allowable Start Circuit Resistance, 24V	0.0012 ohms
Recommended Starter Cable, 12V 100"	#00
Recommended Starter Cable, 24V 100"	#2
Recommended Starter Cable, 12V 200"	#0000 or 2#00
Recommended Starter Cable, 24V 200"	#0
Electrical Component Maximum Temperature Limit	125 °C 257 °F

Performance Curve: 6090SFM85\_F

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.

# Engine Installation Criteria

## Fuel System

ECU Description	L14		
Fuel Injection Pump	HPCR		
Governor Type	Electronic		
Volumetric Fuel Consumption, Prime	71.3 L/hr	18.8 gal/hr	
Mass Fuel Consumption, Prime	60.6 kg/hr	134 lb/hr	
Total Fuel Volumetric Flow	221 L/hr	58.4 gal/hr	
Total Fuel Mass Flow	188 kg/hr	414 lb/hr	
Max. Fuel Inlet Restriction*	20 kPa	80 in.H2O	
Max. Fuel Inlet Pressure	20 kPa	80 in.H2O	
Max Fuel Return Pressure	20 kPa	80 in.H2O	
Max. Fuel Height Above Transfer Pump	2.4 m	7.9 ft	
Max. Leak-off Return Height	2.4 m	7.9 ft	
Max. Fuel Inlet Height Above Fuel Tank Supply	2.4 m	7.9 ft	
Normal Operation Fuel Temperature	40 °C	104 °F	
Max. Fuel Inlet Temperature	100 °C	212 °F	
Min. Recommended Fuel Line Inside Diameter	8 mm	0.32 in	
Min. Recommended Fuel Line Size	6 (-) AN		
Primary Fuel Filter	10 mic		
Secondary Fuel Filter	2 mic		

## Lubrication System

Oil Pressure at 1800 RPM**	238 kPa	35 psi	
Max. Crankcase Pressure	2 kPa	8 in.H <sub>2</sub> O	
Maximum Installed Angle, Front Down	0 deg		
Maximum Installed Angle, Front Up	12 deg		
Engine Angularity Limits Any Direction, Continuous***	20 deg		
Engine Angularity Limits Any Direction, Intermittent***	30 deg		

## Seawater Pump System

Seawater Pump Flow	336 L/min	89 gal/min	
Max. Suction Lift	3 m	9.8 ft	
Max. Outlet Pressure	140 kPa	20 psi	
Max. Inlet Restriction	30 kPa	4 psi	

\* With clean filters

\*\* With John Deere Plus-50 II™ 15w-40, not applicable with break in oil.

\*\*\* With 1932 option

## Air Intake System

Engine Air Flow	23.5 m <sup>3</sup> /min	830 ft <sup>3</sup> /min	
Intake Manifold Pressure	238 kPa	34.5 psi	
Manifold Air Temperature	40 °C	103 °F	
Maximum Manifold Air Temperature	67 °C	152.6 °F	
Max. Allowable Temperature Rise, Ambient Air to Engine Inlet	17 °C	30 °F	
Max. Air Intake Restriction, Clean Air Cleaner	3 kPa	12 in.H <sub>2</sub> O	
Max. Air Intake Restriction, Dirty Air Cleaner	6.25 kPa	25 in.H <sub>2</sub> O	
Min. Ventilation Area	0.145 m <sup>2</sup>	224 in <sup>2</sup>	

## Performance Data

Prime Power	278 kW	373 hp	
10% Overload Power	306 kW	410 hp	
Rated Speed	1800 RPM		
Low Idle Speed	1000 RPM		
Prime Torque	1476 Nm	1088 lb-ft	
BMEP, Prime	2061 kPa	299 psi	
Rated Pferdestärke, Prime (metric hp)	378 ps		
Front Drive Capacity, Intermittent	955 Nm	704 lb-ft	
Front Drive Capacity, Continuous	955 Nm	704 lb-ft	
Software and Label Convertible to 50 Hz?	YES		

## Exhaust System

Exhaust Flow	51.3 m <sup>3</sup> /min	1812 ft <sup>3</sup> /min	
Exhaust Flow @ gas STP	22.5 m <sup>3</sup> /min	795 ft <sup>3</sup> /min	
Exhaust Temperature	402 °C	755.6 °F	
Max. Allowable Exhaust Restriction	7.5 kPa	30 in.H <sub>2</sub> O	
Max. Shear on Turbocharger Exhaust Outlet	11 kg	24.3 lb	
Max. Bending Moment on Turbocharger Exhaust Outlet	7 Nm	15.4 lb-ft	
Min. Exhaust Pipe Diameter, Dry	114.3 mm	4.5 in	
Min. Exhaust Pipe Diameter, Wet	127.0 mm	5.0 in	

Performance Curve: 6090SFM85\_F

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.

## Engine Installation Criteria

Engine Performance Data Table

Engine Power	Crank Power		Crank Torque		Fuel Consumption		BSFC
	kW	hp	Nm	lb-ft	L/hr	gal/hr	
25%	70	93	369	272	19.6	5.2	240
50%	139	186	737	544	36.1	9.5	221
75%	209	280	1106	816	53.2	14.0	217
100%	278	373	1475	1088	71.3	18.8	218
110%	306	410	1623	1197	80.2	21.2	223

Performance Curve: 6090SFM85\_F

All values at rated speed and power at standard conditions per SAE J1995 unless otherwise noted.