


# G730<sup>®</sup>

## BUILT TOUGH FOR HEAVY LOADS

- ⚙️ Rugged die-cast aluminum housing ideal for heavier lawn tractors
- ⚙️ Durable 1 inch axle for heavier loads
- ⚙️ Efficient 10cc pump & 16cc motor
- ⚙️ Produces up to 230 ft/lbs of torque

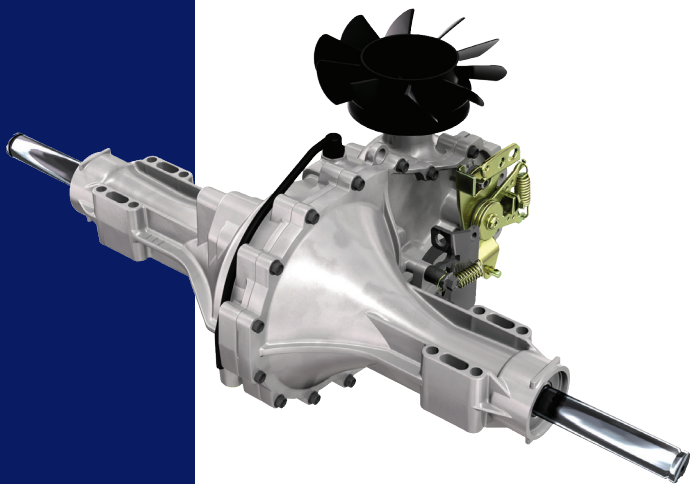

 **HYDRO-GEAR<sup>®</sup>**

**DESIGNED & ASSEMBLED IN THE USA**

# **EFFICIENT & RELIABLE**

## **SPECIFICATIONS**

<b>Overall Transaxle Reduction</b>	<b>27.5:1</b>
<b>Pump Displacement</b>	<b>0.61 in<sup>3</sup>/rev [10 cc/rev]</b>
<b>Motor Displacement</b>	<b>0.97 in<sup>3</sup>/rev [16 cc/rev]</b>
<b>Charge Pump Displacement</b>	<b>0.11 in<sup>3</sup>/rev [1.9 cc/rev]</b>
<b>Input Speeds</b>	
<b>Max Hi-idle (No Load)</b>	<b>3600 rpm</b>
<b>Min (Loaded)</b>	<b>1800 rpm</b>
<b>Output Torque</b>	
<b>Continuous</b>	<b>230 lb-ft [312 Nm]</b>
<b>Intermittent</b>	<b>445 lb-ft [603 Nm]</b>
<b>Weight on Tires (per unit)</b>	
<b>Max w/ 20in Tires</b>	<b>770 lb [350 kg]</b>
<b>Max w/ 22in Tires</b>	<b>700 lb [318 kg]</b>
<b>Max w/ 23in Tires</b>	<b>665 lb [302 kg]</b>
<b>Axle Shaft Diameter</b>	<b>1.00 in [25.4 mm]</b>
<b>Weight of Unit</b>	<b>42 lbs [19 kg]</b>

*Specifications subject to change without notice*

**FOR MORE INFORMATION VISIT:  
WWW.HYDRO-GEAR.COM**



G730-10/2017-V1