PowerTech ™ 4045TF250 Diesel Engine

Industrial Engine Specifications






4045TF250 shown

Certifications

Aspiration

Non-Emissions Certified

Engine dimensions

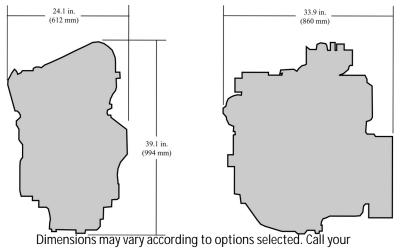

distributor for more information.

General data	
Model	4045TF250
Number of cylinders	4
Displacement - L (cu in)	4.5 (275)
Bore and Stroke mm (in)	106 x 127 (4.17 x 5.00)
Compression Ratio	17.0:1
Engine Type	In-line 4-Cycle

Turbocharged

Length - mm (in)	860 (33.9)	
Width - mm (in)	612 (24.1)	
Height mm (in)	994 (39.1)	
Weight, dry kg (lb)	396 (873)	

Performance data range Application ratings Intermittent Rated power/Rated speed 85-93 kW (114-125 hp) @2200-2400rpm Peak power 85-93 kW (114-125 hp) @2200-2400rpm Power bulge NA @ NA rpm 445-446 N.m (328-329ft-lb) @1400-1500rpm Peak torque Torque rise

The Industrial Intermittent engine power rating is for applications that operate at varying loads and speeds, and do not fit the Industrial Heavy-Duty rating information.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

Features and benefits

Dynamically Balanced Crankshaft

- Crankshafts are formed from nodular iron

Forged-Steel Connecting Rods

- Unique 45-degree design permits use of larger crankshaft connecting-rod bearings for increased durability

Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

Optional Engine-Balancer Shafts

- Provides smooth engine operation